



Installing Motorola V276 Small LCD Display Screen



Step 1 - disassembly Front panel/ Screen Logic Board

- Using the iPod opening tool pry off the top faceplate.
- Place the tool in the small crack that runs along the side of the phone and pry.



Step 2

- Using the T6 Torx Screwdriver remove all 4 small screws.

Installing Motorola V276 Small LCD Display Screen

Step 3


- Remove silver plate from phone.





Step 4

- Using the spudger remove the plastic camera casing

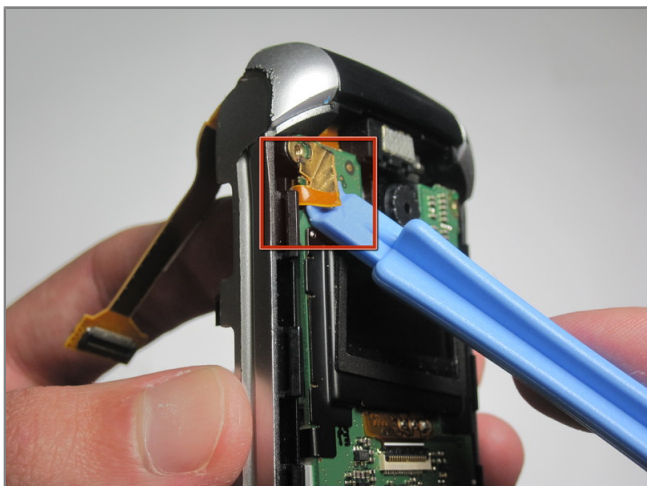


Step 5

- Using the iPod Opening Tool remove the yellow flex cable from the green logic board.




Step 6

- Use Spudger or hands to detach flex cable from front screen logic board

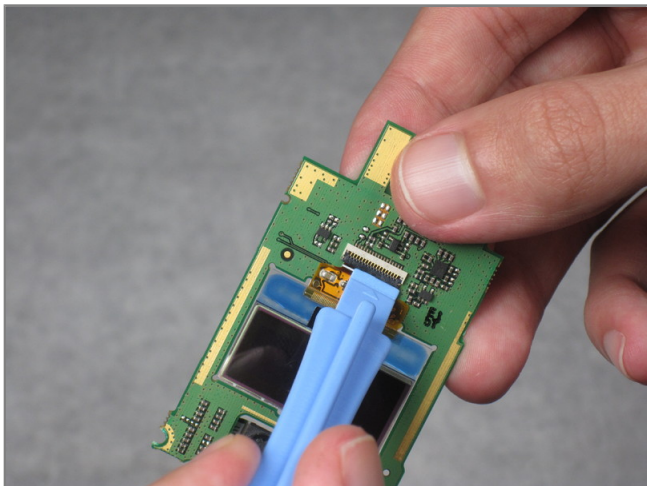


Step 7 - Small LCD Display Screen

- Using the iPod opening tool, lift the small black flap to unlock the screen from the logic board.

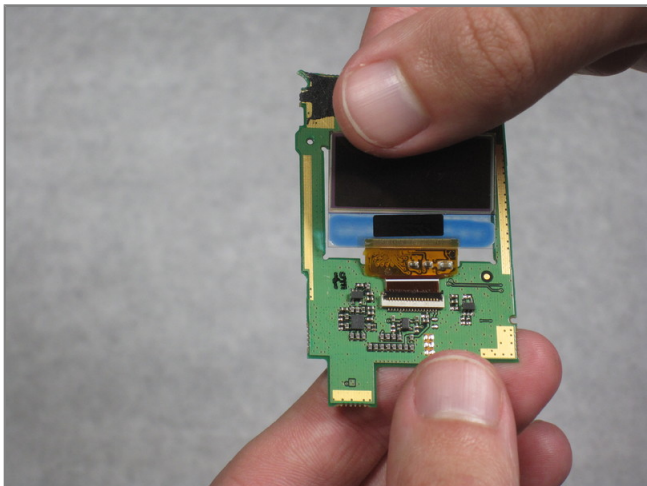

Step 8

- Using your fingers, carefully pull out the small LCD display screen.

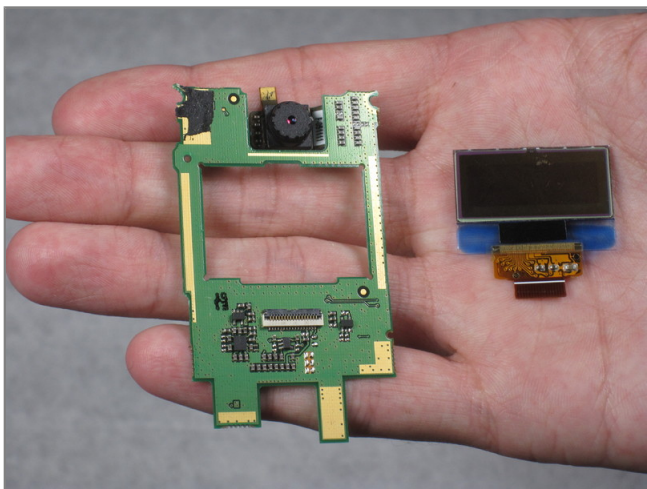

Step 9

- Remove the small LCD display screen completely from the green logic board.